

SoundAcoustics MP700/40

Application: Reduce interior noise due to excess reverberation/echo

Frequency Characteristics: 500 Hz -20 KHz

Dimensions: 700 x 700 x 40 mm

Installation: Builders Adhesive or Silicone (Ceiling)

Colour: Arctic White

The SoundAcoustics MP700-40 is a Class 1 fire rated acoustic panel designed to control excessive noise levels due to echo and reverberation. The stylish but unobtrusive design provides aesthetically pleasing acoustic control.

The panel is ideally suited for ceiling installation in commercial or domestic areas with significant hard reflective surfaces (glass, tiled floors etc.) such as restaurants, open plan offices, call centres and school halls.


The MP700-40 is also suitable for applications requiring a high fire rating such as multi-level buildings and music venues.

Chemical and heat resistant

The MP700-40 is resistant to heat and chemical breakdown, making it suitable for installation in indoor pool areas and demanding industrial applications.

Installation

The MP700/40 is a lightweight panel that can be easily adhered to ceilings without requiring additional support. The panels can be simply installed on the ceiling with either silicone or builder's adhesive.

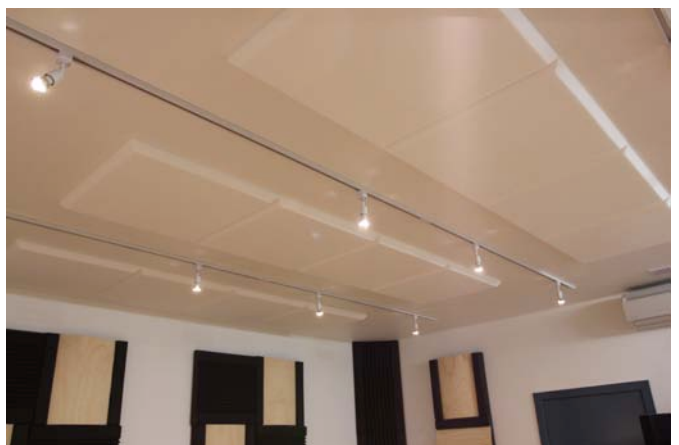

For further information contact:

SoundAcoustics

ph & fax: 03 9410 9335

sales@soundacoustics.com.au

www.soundacoustics.com.au